




we professional!

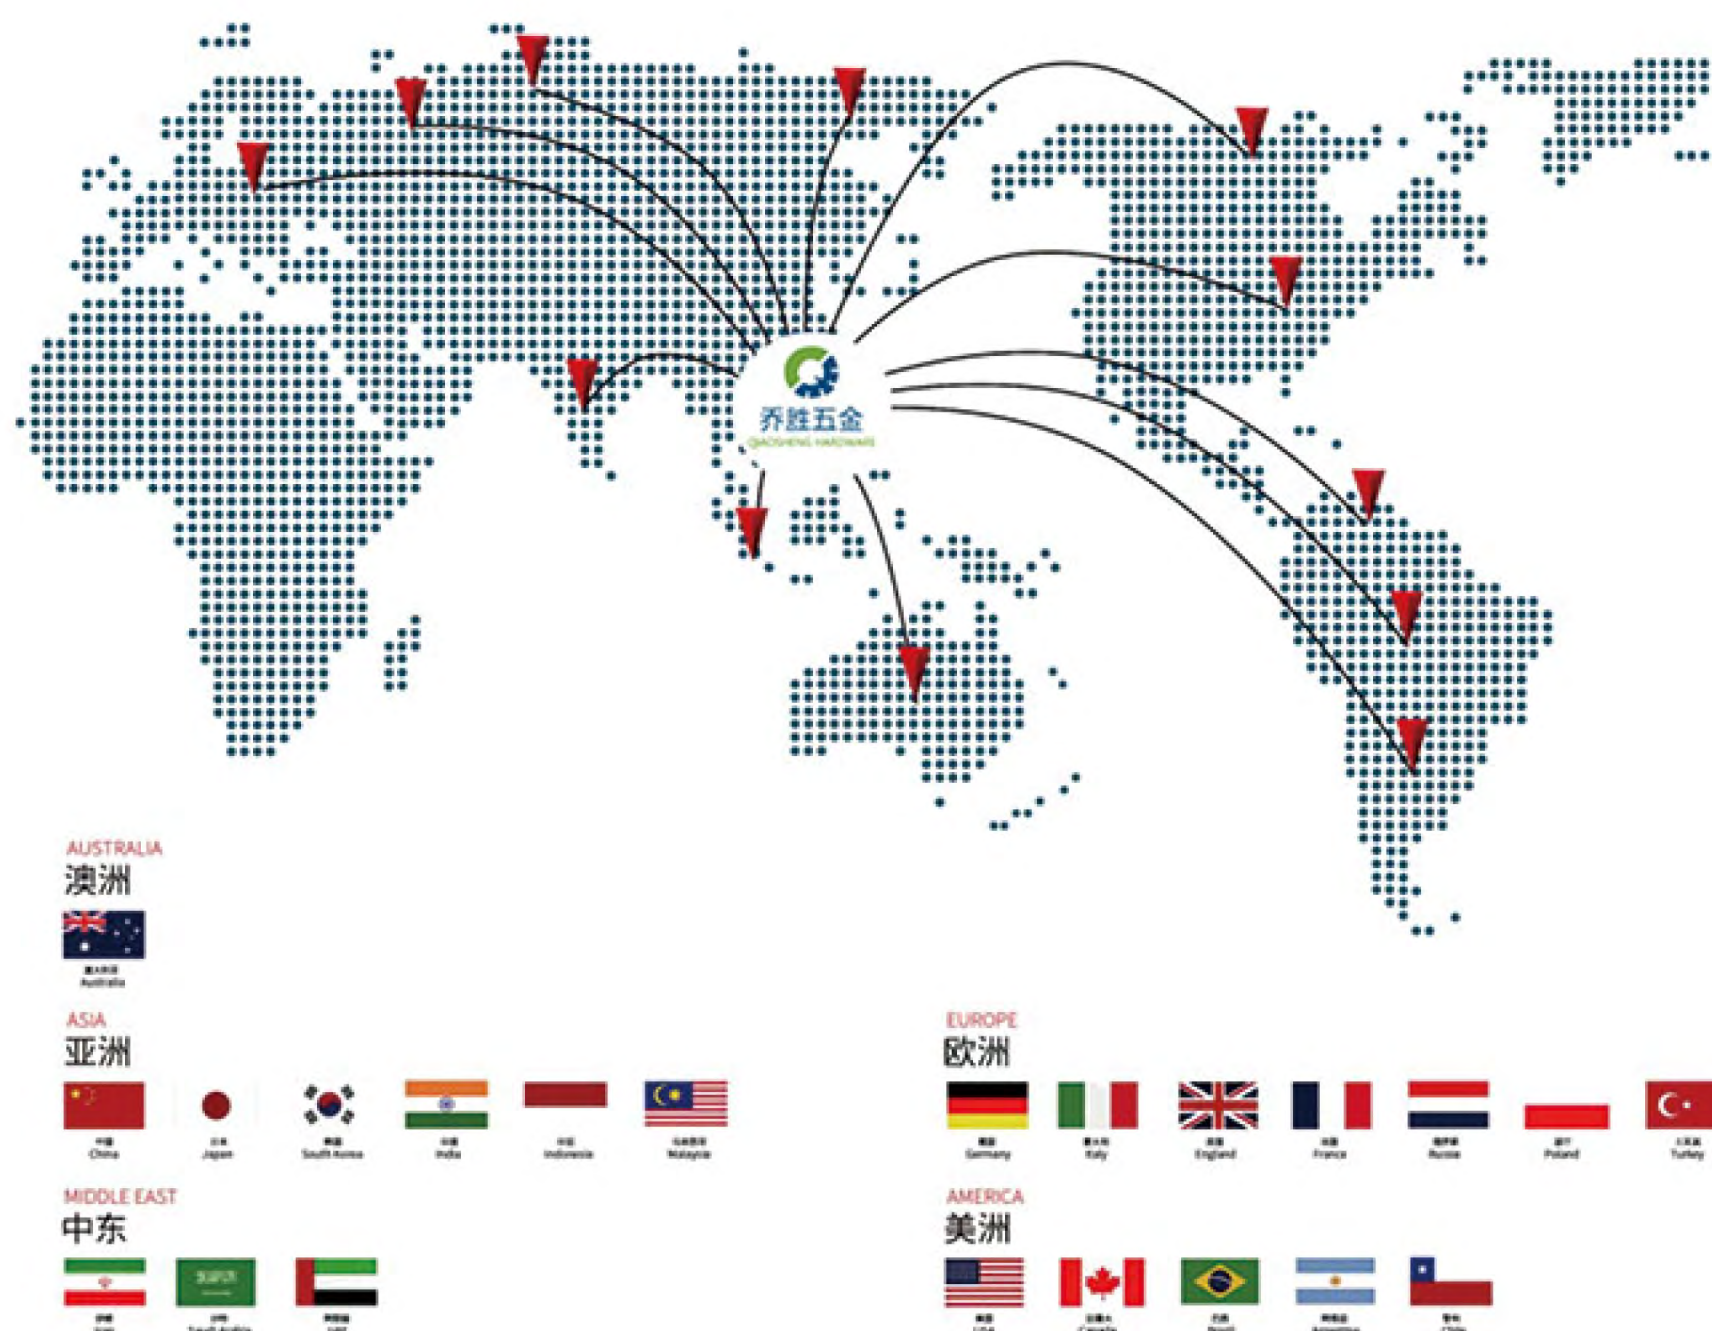

About Us

Company Introduction:

Welcome to FAIRBIZ INTERNATIONAL CO., LIMITED. Founded in Hong Kong in 2004, FairBiz is an enterprise dedicated to exporting premium hardware products worldwide. To expand production capacity and optimize product supply, we set up hinge factory in China back in 2012.

A trusted cabinet hinge manufacturer and kitchen hardware supplier dedicated to serving the Middle East and global markets.

We specialize in producing premium soft-close hinges designed to bring a neat, quiet, and organized feel to modern homes.

Backed by years of precision engineering and strict quality control, FairBiz provides factory-direct pricing, reliable OEM/ODM services, and seamless export logistics tailored for international distributors and contractors.



PREMIUM HYDRUALIC HINGE



FB108 Series

3D Hydraulic clip-on Hinge



FB108
0 Full Overlay

产品参数 Product Parameter

- 材质: 冷轧钢
Material: cold-rolled steel
- 表面处理: 铁镀镍
Thickness: Iron
- 重量: 105g
Weight: 105g
- 开启角度: 105°
Opening angle: 105°
- 铰杯深度: 11.5mm
Depth of hinge cup: 11.5mm
- 铰杯直径: 35mm
Diameter of hinge cup: 35mm
- 门板钻孔尺寸: 3-5mm
Door drilling size: 3-5mm
- 适用门板厚度: 14-18mm
Door thickness: 14-18mm



背部结构 Beside View






D单位, A间隙位计算表 The D unit, A clearance calculation table

D	K	3	4	5	6	7
H						
H=0		16	17	18	19	20
H=3		13	14	15	16	17

D	K	3	4	5	6	7
H						
H=0		7	8	9	10	11
H=3		4	5	6	7	8

D	K	3	4	5	6	7
H						
H=0		-2.5	-1.5	-0.5	0.5	1.5

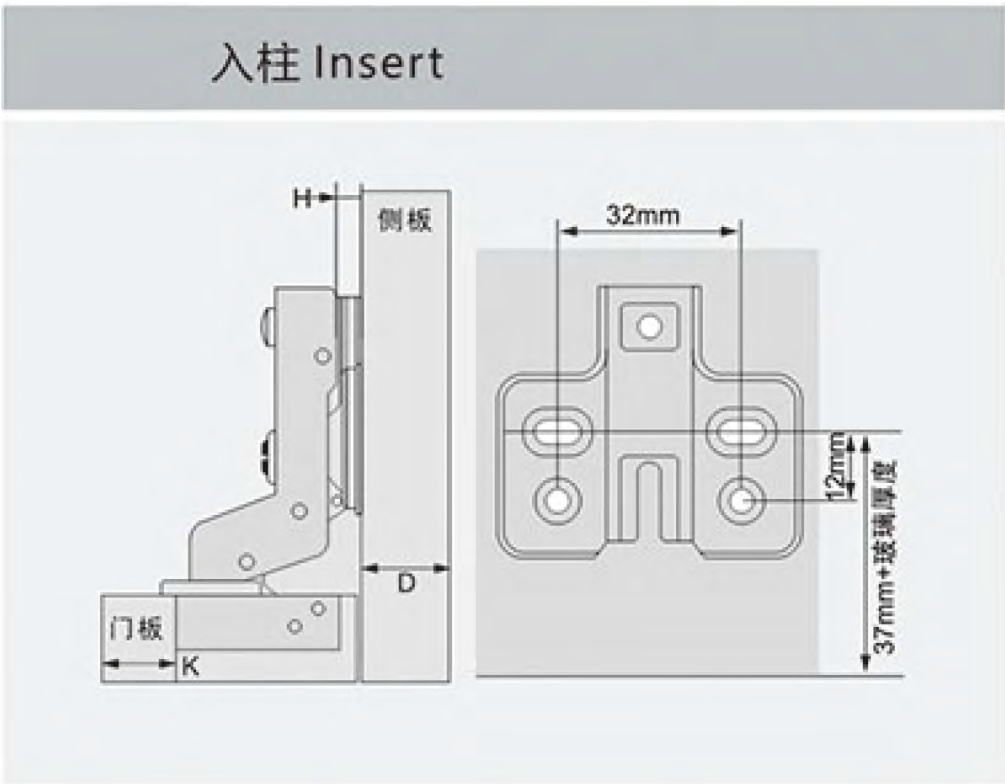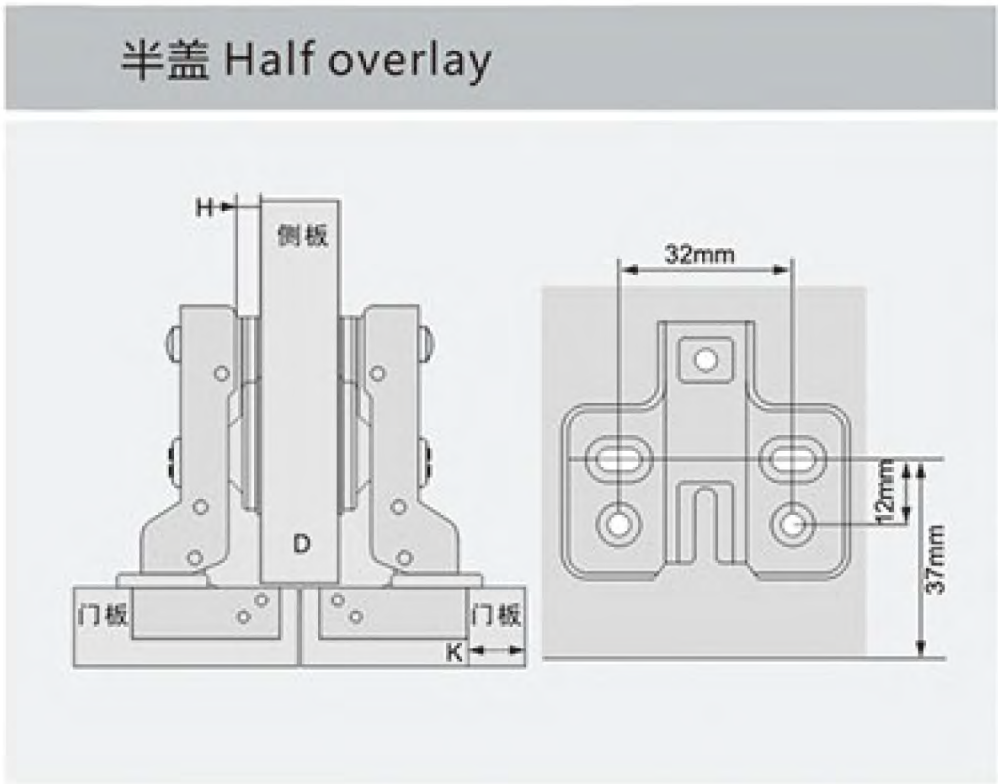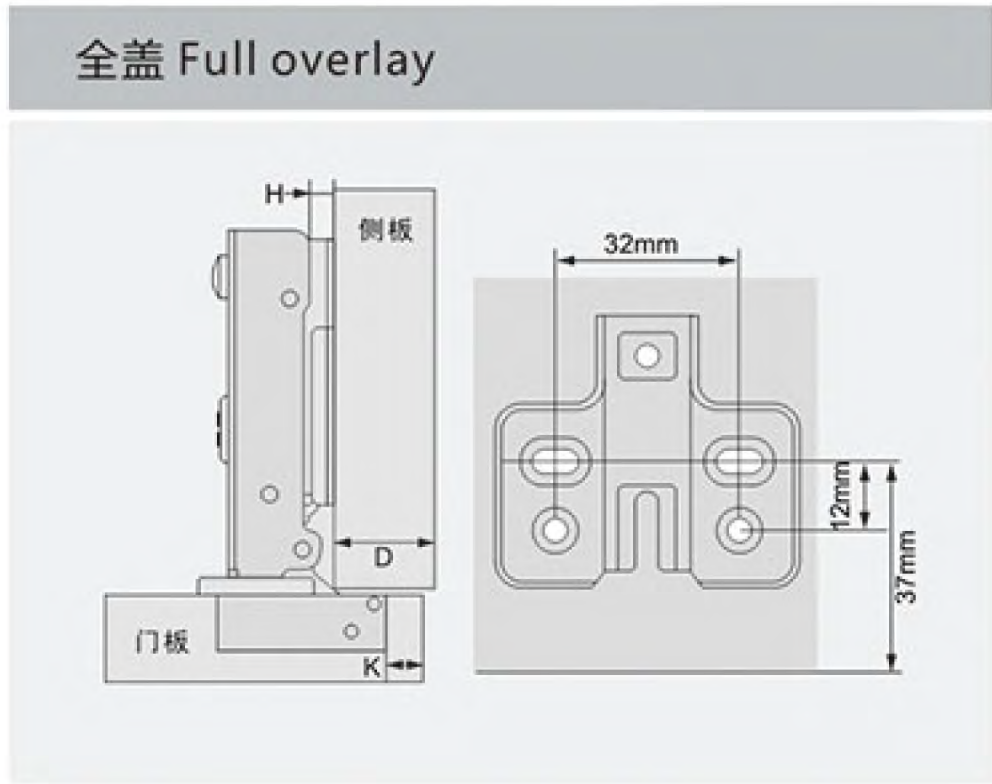

S45° S90° S135° S175°

Angel 3D Hinge



S45°
角度三维
Angle 3D hinge



S90°
角度三维
Angle 3D hinge



S135°
角度三维
Angle 3D hinge



S175°
角度三维
Angle 3D hinge

产品参数 Product Parameter


- 材质: 冷轧钢
Material: cold-rolled steel
- 表面处理: 铁镀镍
Thickness: Iron
- 铰杯孔距: 45mm/48mm
Hole spacing: 45mm/48mm

- 开启角度: 45° 90° 135° 175°
Opening angle: 45° 90° 135° 175°
- 铰杯深度: 11.5mm
Depth of hinge cup: 11.5mm
- 铰杯直径: 35mm
Diameter of hinge cup: 35mm


- 门板钻孔尺寸: 3-7mm
Door drilling size: 3-7mm
- 适用门板厚度: 14-21mm
Door thickness: 14-21mm




全盖 Full overlay

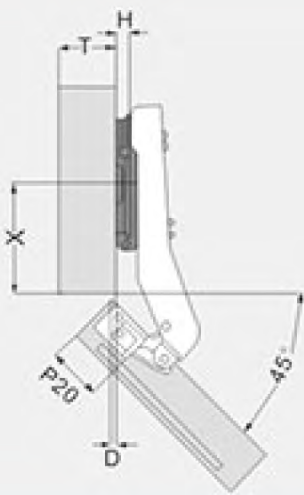


半盖 Half overlay

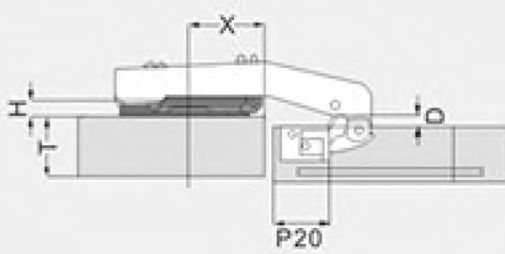

入柱 Insert

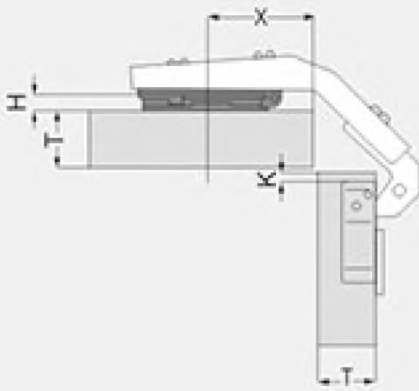

入柱 Insert

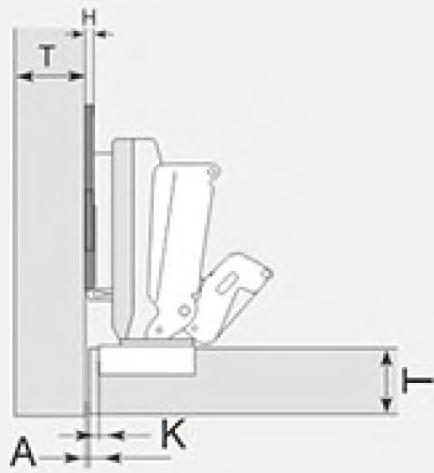

FB206 Series

Hydraulic clip-on Hinge



FB206-A
0 Full Overlay



FB206-B
8 Half Overlay



FB206-C
15 Insert

产品参数 Product Parameter

- 材质: 冷轧钢
Material: cold-rolled steel
- 表面处理: 铁镀镍
Thickness: Iron
- 铰杯孔距: 45mm/48mm
Hole spacing: 45mm/48mm
- 开启角度: 105°
Opening angle: 105°
- 铰杯深度: 11.3mm
Depth of hinge cup: 11.3mm
- 铰杯直径: 35mm
Diameter of hinge cup: 35mm
- 门板钻孔尺寸: 3-5mm
Door drilling size: 3-5mm
- 适用门板厚度: 14-18mm
Door thickness: 14-18mm



合金扣 98克

可选底座 Base plate flexible collocation




D单位, A间隙位计算表 The D unit, A clearance calculation table

D	K	3	4	5	6	7
H=0		16	17	18	19	20
H=3		13	14	15	16	17


D	K	3	4	5	6	7
H=0		7	8	9	10	11
H=3		4	5	6	7	8

D	K	3	4	5	6	7
H=0		-2.5	-1.5	-0.5	0.5	1.5
H=3						


全盖 Full overlay

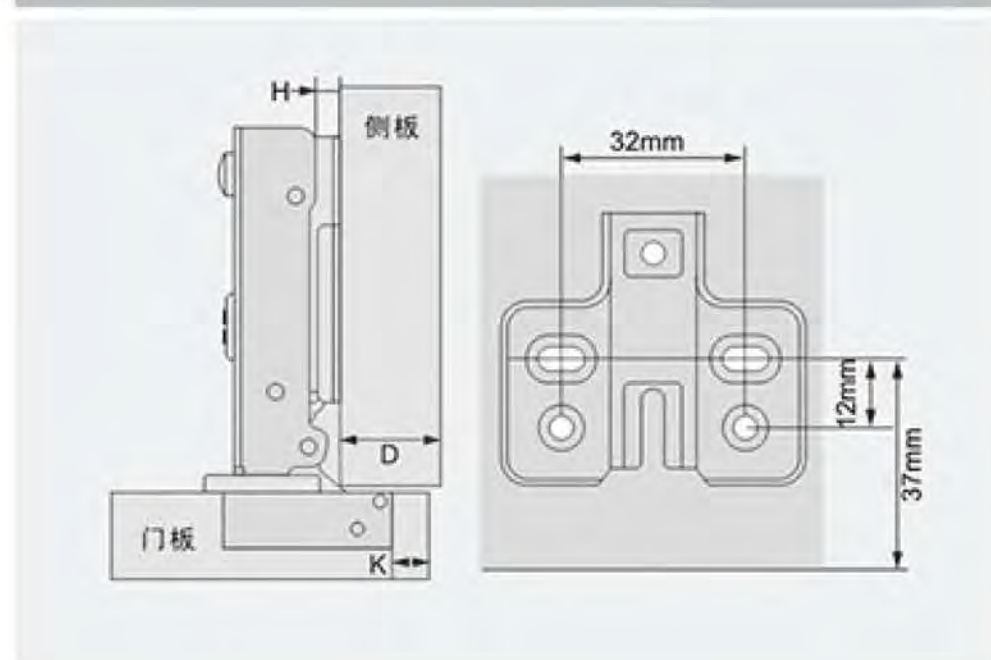

半盖 Half overlay

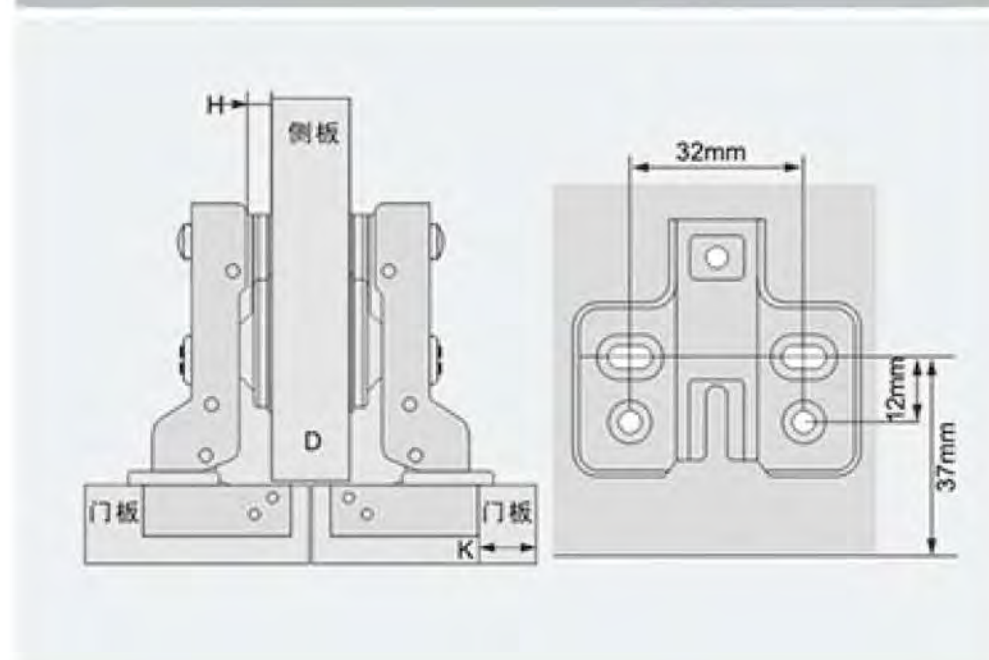

入柱 Insert

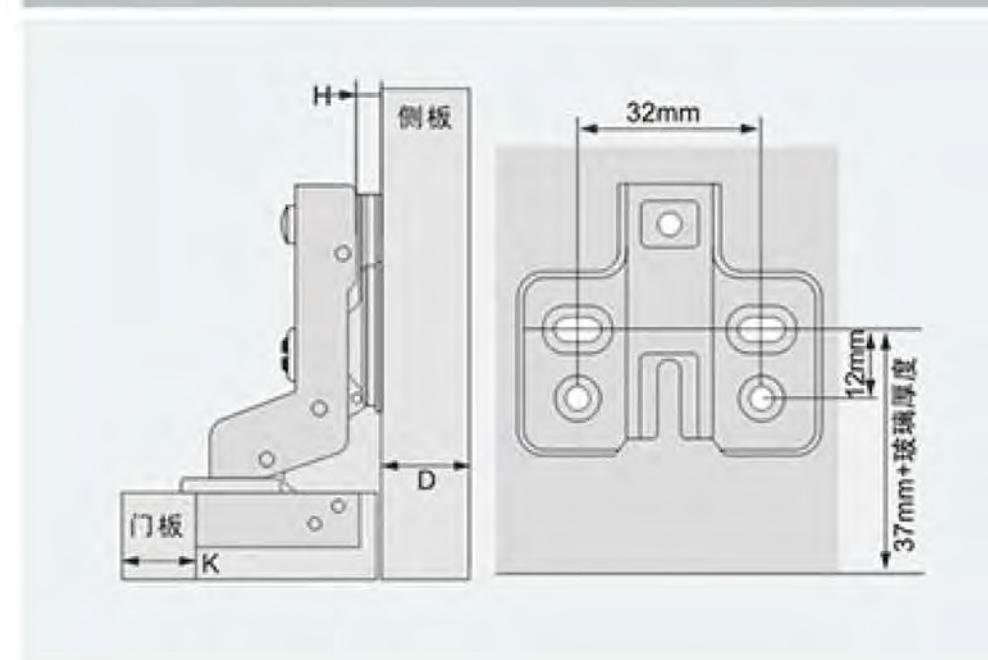



产品参数 Product Parameter

- 材质: 冷轧钢
Material: cold-rolled steel
- 表面处理: 铁镀镍
Thickness: Iron
- 重量: 105g
Weight: 105g
- 开启角度: 105°
Opening angle: 105°
- 铰杯深度: 11.5mm
Depth of hinge cup: 11.5mm
- 铰杯直径: 35mm
Diameter of hinge cup: 35mm
- 门板钻孔尺寸: 3-5mm
Door drilling size: 3-5mm
- 适用门板厚度: 14-18mm
Door thickness: 14-18mm



背部结构 Beside View



D单位, A间隙位计算表 The D unit, A clearance calculation table


安装尺寸示意图 Installation dimension diagram

D	3	4	5	6
0	17	18	19	20
2	15	16	17	18

配自攻螺丝
With self-tapping screw

配欧洲螺丝
With euro screw

配M10胶粒
With Easy-on screw(M10)

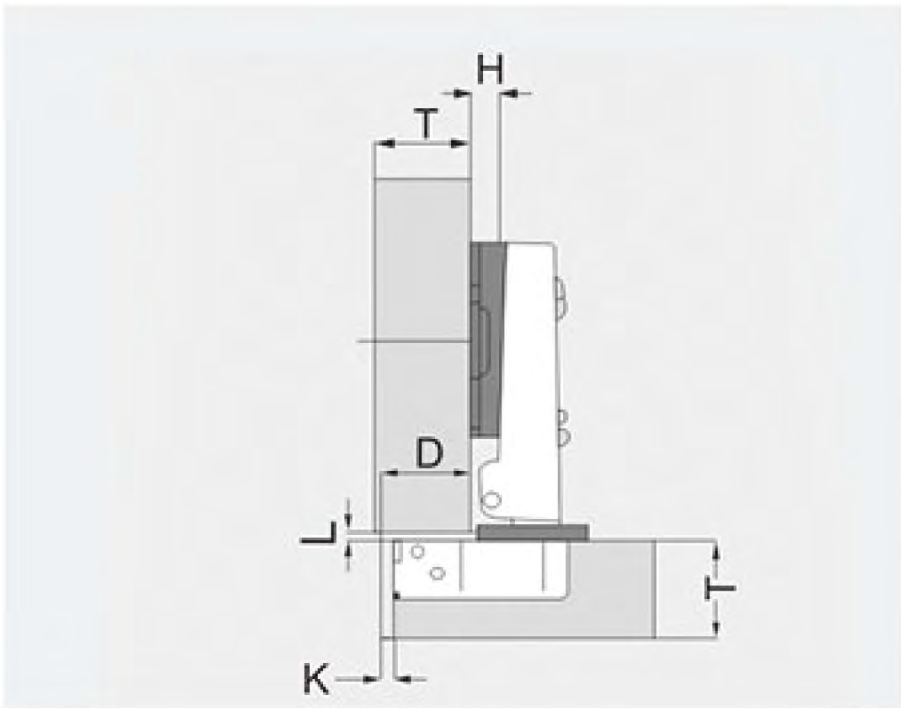



Contact: alex zhou

Mob: +86-13678141288

Email: S01@fairbiz.com